

ERGOPLUS 50

CE EN60974-7




| CODE | ↔ | | | |
|------------|-----|-------|--|---|
| MA4209-030 | 3 m | 10' | | 1 |
| MA4209-040 | 4 m | 12' | | 1 |
| MA4209-050 | 5 m | 16.4' | | 1 |

| TECHNICAL DATA | | |
|----------------|---------------------|---------------|
| | ERGOPLUS 50 | |
| | 1,4 kg | 3.09 lb |
| | 113 | |
| | 1,0 ÷ 2,4 mm | .040" ÷ 3/32' |
| | 500A CO2 - 450A Mix | |





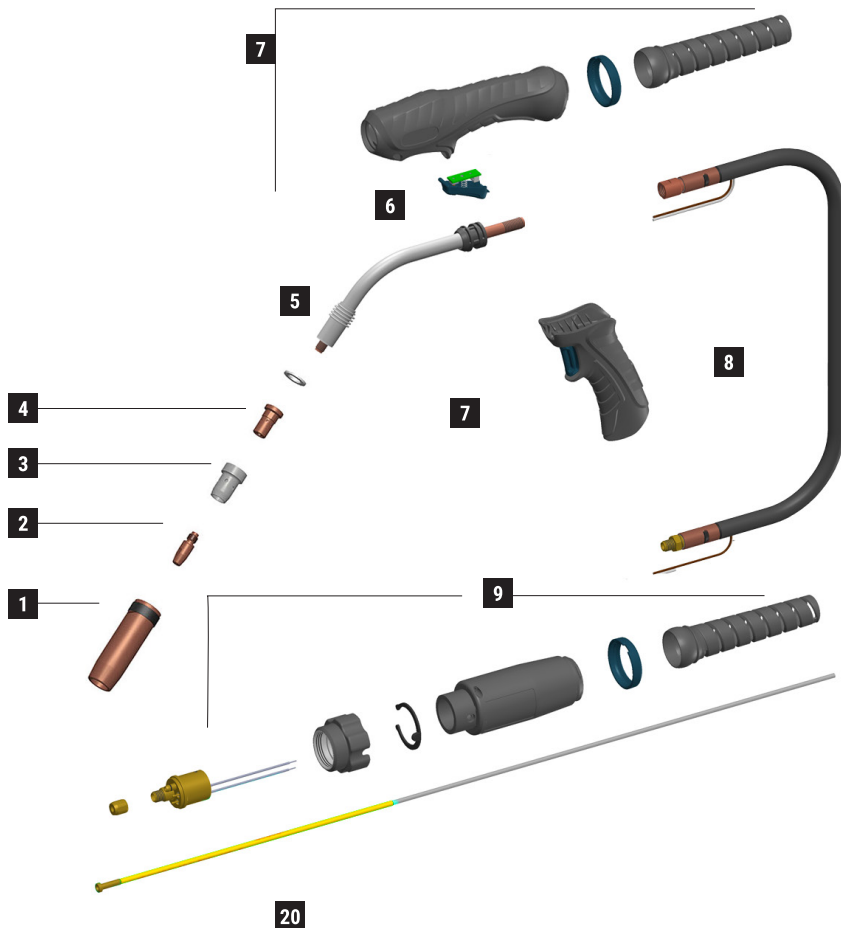






MIG *Standard equipment in all torch packages*

MT0566





















EURO

20

| | CODE |  |  | Ø | |  | | REF |  |
|----|-----------|---|---|--------------|---------------|---|---------|----------|---|
| 1 | MC0568 |  | quick release nozzle - 2,5 mm thickness | 16 mm | 5/8" | 76 mm | 3" | - | 10 |
| 2 | MD0005-82 |  | M8 - CuCrZr | 1,2 mm | .045" | 30 mm | 1"-3/16 | 140.0445 | 20 |
| 3 | ME0390 |  | M8 - copper | | | 25 mm | 31/32" | - | 10 |
| 4 | ME0579 |  | ceramic | 16 mm | 5/8" | 28 mm | 1"-3/32 | - | 10 |
| 20 | GM0540 |  | yellow steel liner | 1,2 ÷ 1,6 mm | .045" ÷ 1/16" | 3 m | 10' | | 1 |
| 20 | GM0541 |  | yellow steel liner | 1,2 ÷ 1,6 mm | .045" ÷ 1/16" | 4 m | 12' | | 1 |
| 20 | GM0542 |  | yellow steel liner | 1,2 ÷ 1,6 mm | .045" ÷ 1/16" | 5 m | 16.4' | | 1 |

***Complete list of available consumables at the end of this section**

| | CODE |  |  |  |
|---|---------------|---|---|---|
| 5 | FB1616-SP |  | front insulator | 5 |
| 5 | MF1545-SP |  | Ergoplus 50 torch head | 1 |
| 6 | MT0563 |  | trigger kit | 1 |
| 7 | MT0577 |  | handle kit | 1 |
| 7 | MT0566 |  | pistol grip | 1 |
| 8 | MH0839-030-SP |  | coaxial cable - 3 m / 10' | 1 |

| | CODE |  |  |  |
|---|---------------|---|---|---|
| 8 | MH0839-040-SP |  | coaxial cable - 4 m / 12' | 1 |
| 8 | MH0839-050-SP |  | coaxial cable - 5 m / 16.4' | 1 |
| 9 | AR0070 |  | EURO connector - air | 1 |
| 9 | BW0020 |  | metal EURO nut | 10 |
| 9 | FA0026 |  | liner nut M10x1 | 10 |
| 9 | MT0565 |  | back box kit EURO | 1 |

STANDARD